


PRODUCT SPECIFICATION SHEET

PRODUCT NAME: SAE/BCI GROUP 8D

DESCRIPTION: BATTERY, WET-MAINTENANCE Free, LEAD-ACID 12-VOLT SLI

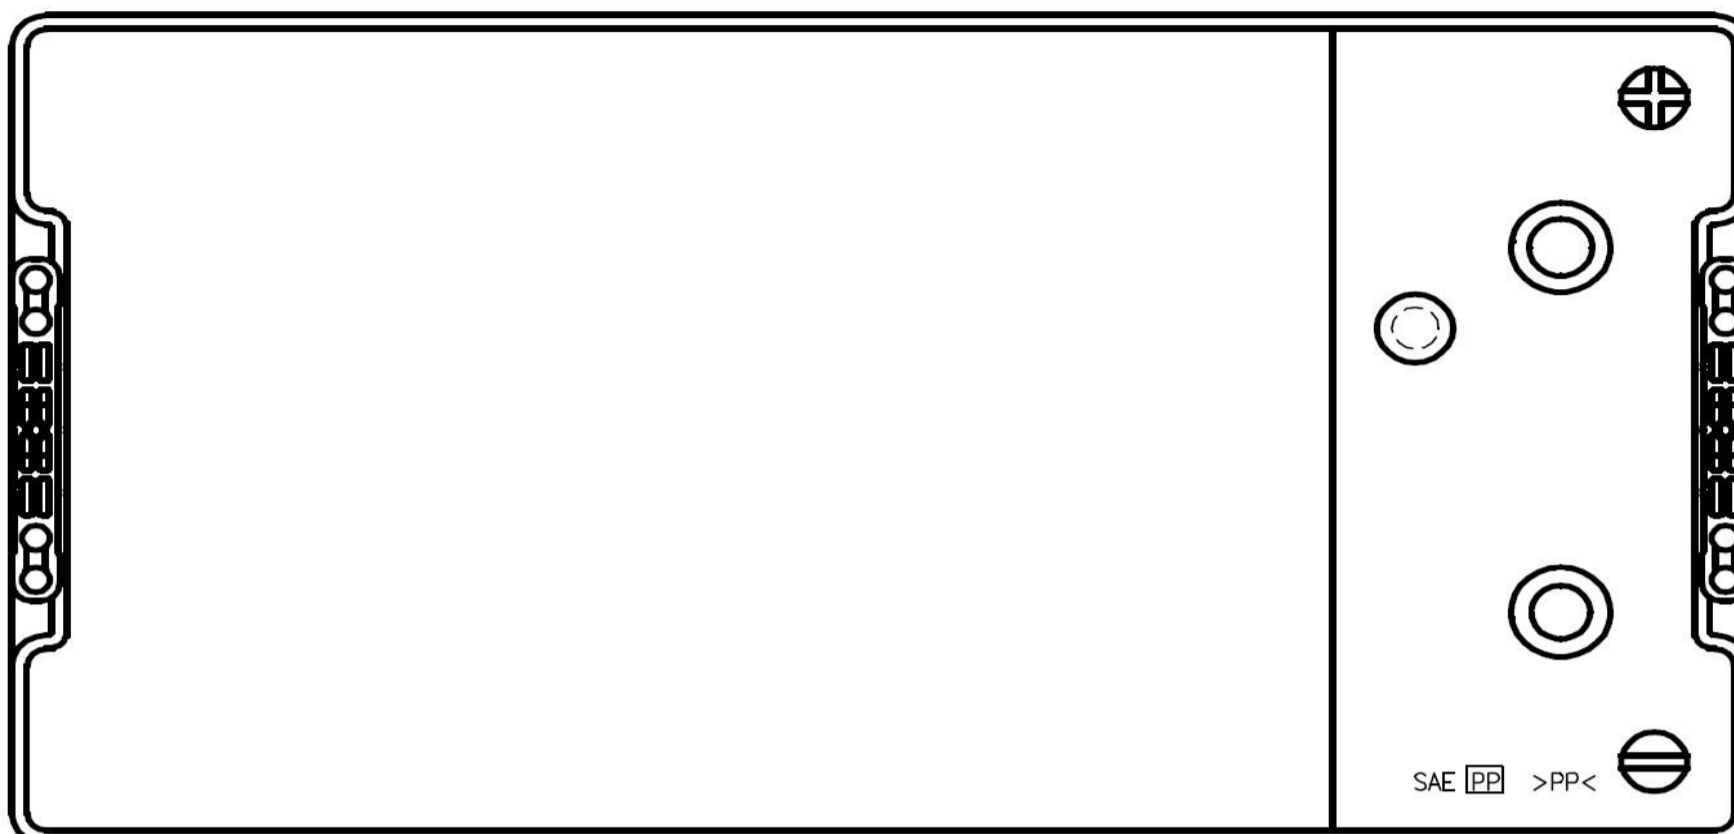

SEBANG
SEBANG GLOBAL BATTERY

PHYSICAL CHARACTERISTICS:

MODEL	LENGTH		WIDTH		HEIGHT		WEIGHT		ELECTROLYTE VOLUME	
	IN	MM	IN	MM	IN	MM	Lbs	Kg	Gal	ℓ
8D-6	20.59	522.99	10.98	278.892	9.84	249.936	108	49.032	3.95	14.95075
8D-7	20.59	522.99	10.98	278.892	9.84	249.936	111	50.394	4.13	15.63205
8D-8	20.59	522.99	10.98	278.892	9.84	249.936	115	52.21	3.97	15.02645

PERFORMANCE CHARACTERISTICS (IN ACCORDANCE TO SAE J537 TEST STANDARDS):

MODEL	CCA	CA	RC	AH	OTHER
	@ 0°F TO 7.2V	@ 32°F TO 7.2V	25A @ 77°F TO 10.50V	C/20 @ 77°F TO 10.50V	
8D-6	1100(-30)	1320	360	160	N/A
8D-7	1300(-30)	1560	340	170	N/A
8D-8	1400(-30)	1680	400	200	N/A

PRODUCT DESIGN FEATURES:

- 1- SEALED, MAINTENANCE-FREE CONSTRUCTION WITH CALCIUM ALLOY GRIDS TO MAXIMIZE LIFE
- 2- INTERGRATED CHARGE STATUS "EYE" FOR QUICK AND CONVENIENT INSPECTIONS
- 3- DURABLE, IMPACT RESISTANCE POLYPROPYLENE CONTAINER AND COVER
- 4- PROPRIETARY SECONDARY COVER TO IMPROVE OUT-GASSING AND CONDENSATION RECOVERY
- 5- CONVENIENT "SUITECASE" STYLE HANDLE FOR EASY INSTALLATION AND HANDLING
- 6- RESIN SEALED AND FORGED TERMINAL BUSHINGS FOR CORROSION RESISTANCE
- 7- ANCHORED ELEMENTS FOR IMPROVED LIFE AND IMPROVED VIBRATION RESISTANCE
- 8- PROPRIETARY SEPARATOR MATERIALS TO RESIST OXIDATION AND IMPROVE LIFE IN HOTTER CLIMATES